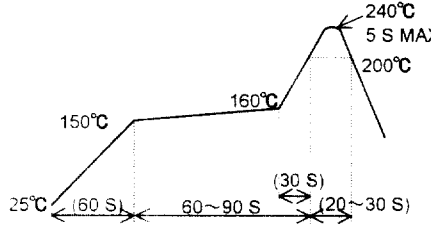


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
<b>APPLICATION STANDARD</b>									
<b>RATING</b>	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C			STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C			
	VOLTAGE	AC 50 V			OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY: 95 % MAX (NO DEW CONDENSATION IS PERMITTED)			
	CURRENT	0.3 A							
<b>SPECIFICATIONS</b>									
<b>ITEM</b>		<b>TEST METHOD</b>			<b>REQUIREMENT</b>			<b>QT</b>   <b>AT</b>	
<b>CONSTRUCTION</b>									
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING			X	X
MARKING		CONFIRMED VISUALLY.						X	X
<b>ELECTRICAL CHARACTERISTICS</b>									
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).			70 mΩ MAX.			X	X
INSULATION RESISTANCE		100 V DC.			100 MΩ MIN.			X	-
VOLTAGE PROOF		150 V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.			X	X
<b>MECHANICAL CHARACTERISTICS</b>									
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.			INSERTION FORCE: 60 N MAX. WITHDRAWAL FORCE: 2.5 N MIN.			X	-
MECHANICAL OPERATION		50 TIMES INSERTION AND EXTRACTIONS.			1)CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-
VIBRATION		FREQUENCY: 10 TO 55 Hz, SINGLE AMPLITUDE: 0.75 mm, ... m/s <sup>2</sup> AT 10 CYCLES FOR 3 DIRECTIONS.			1)NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-
SHOCK		490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.						X	-
<b>ENVIRONMENTAL CHARACTERISTICS</b>									
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C, 90~95 %, 96 h.			1)CONTACT RESISTANCE: 80 mΩ MAX. 2)INSULATION RESISTANCE: 100 MΩ MIN.			X	-
RAPID CHAGE OF TEMPERTURE		TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3min. UNDER 5 CYCLES.			3)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-
DRY HEAT		EXPOSED AT 85 °C, 96 h.			1)CONTACT RESISTANCE: 80 mΩ MAX.			X	-
COLD		EXPOSED AT -55 °C, 96 h.			2)NO DAMAGE, CRACK AND LOOSENESS OF PART.			X	-
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			NO HEAVY CORROSION			X	-
SULPHUR DIOXIDE		EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD:JIS C 0090)			1)CONTACT RESISTANCE: 80 mΩ MAX. 2)NO HEAVY CORROSION.			X	-
RESISTANCE TO SOLDERING HEAT		REFLOW RECOMMENDED TEMPERATURE PROFILE  25°C (60 S) → 150°C → 160°C → 240°C (5 S MAX) → 200°C (30 S) → (20~30 S)			NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT			X	-
SOLDRABILITY		SOLDERED AT SOLDER TEMPERATURE, 235 °C FOR IMMERSION DURATION, 2 s			NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.			X	-
REMARKS				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
				<i>J. Matsukawa</i>	<i>J. Matsukawa</i>	<i>M. Ishida</i>	<i>T. Yoshimura</i>		
UNLESS OTERWISE SPECIFIED ,REFER TO JIS C 5402.				00.01.15	00.01.15	00.01.17	00.01.17		
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST									
<b>HRS</b> HIROSE ELECTRIC CO. LTD.				<b>SPECIFICATION SHEET</b>			PART NO. <b>FX11B - 100P - SV0.5 (21)</b>		
CODE NO.(OLD)		DRAWING NO		CODE NO.		1			
CL		ELC4 - 152628 - 01		CL 573 - 0653 - 5 - 21		1			

TO  
PCK